

## 1U RACK MOUNT FIBER DISTRIBUTION FRAME



### FEATURES/ BENEFITS


- *Up to 48 fibres in 1U*
- *Multiple Adaptor options available*
- *24 Adaptor positions*
- *Recessed Adaptor positioning*
- *Individually labelled ports*
- *45° open working angle*
- *Accepts loose tube, distribution and pre terminated cables*
- *RoHS, REACH SvHC and UL rated*
- *Fits standard 19"*

### APPLICATION

- *Data centers, premise installations, telecommunication networks*
- *Ethernet, Fibre Channel, ATM, LAN, MAN and WAN*
- *Data communication*
- *Indoor applications*

### SPECIFICATIONS

Height	1U (44.4mm)
Width	482 mm
Depth	205 mm
Net weight	2.5 Kg
IP Rating	IP20
Adaptor Type	SC Simplex/ LC Duplex/ E2000
Number of Ports	24
Cable Entry 20mm	20 mm - 2 Nos, 25mm - 2 Nos
Material	Cold rolled steel
Material thickness	1.2 mm
Material coating	Powder Coating
Colour	RAL 9004
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754
Compliant to	RoHS, Reach/ SVHC

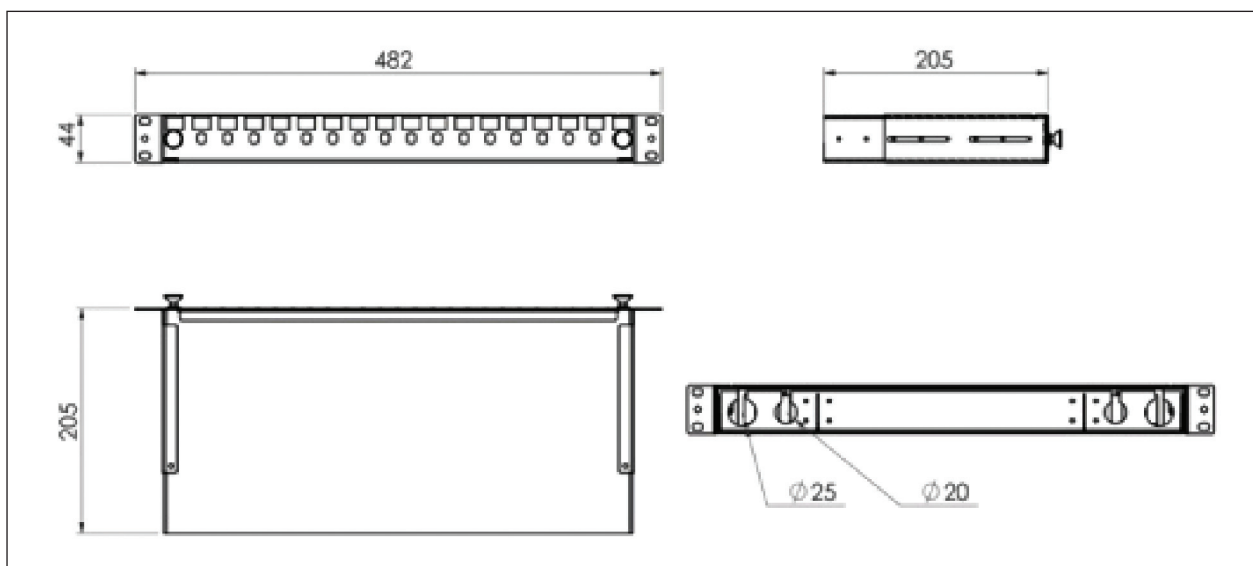

**PART NUMBER GENERATOR**

INTELPPR/---/---/---/	Number of ports: <i>12, 24, 48...</i>
	Adaptor: <i>SC, LC ST, FC, E2000, MU or others</i>
	Adaptor Type: <i>DX - Duplex/SX - Simplex</i>
INTELPPR12SCDX	12 port SC Duplex Rack mount fiber distribution