

4 PORT MICRO ODF



FEATURES

- Suitable for multi type adapter installation
- No screws needed for installing adapters
- Mount on wall or just put on the ground
- ABS material used ensures the body strong and light

APPLICATION

- Optical fiber communication system
- Fiber broadband access network
- FTTH fiber into the home
- Optical fiber CATV


SPECIFICATIONS

Dimension A*B*C (mm)	100.6*80.6*28.8
Application	3.0 x 2.0 mm indoor cable
Fiber diameter	125 μm (652D & 657A1/A2)
Tight cladding diameter	250 μm & 900 μm
Mode of application	Single mode and multimode
Tensile strength	>50 N
End-use temperature	-40~ + 85°C
Adapter	SC & LC
Insertion loss	≤0.2dB (1310 nm & 1550 nm)
Output port	4







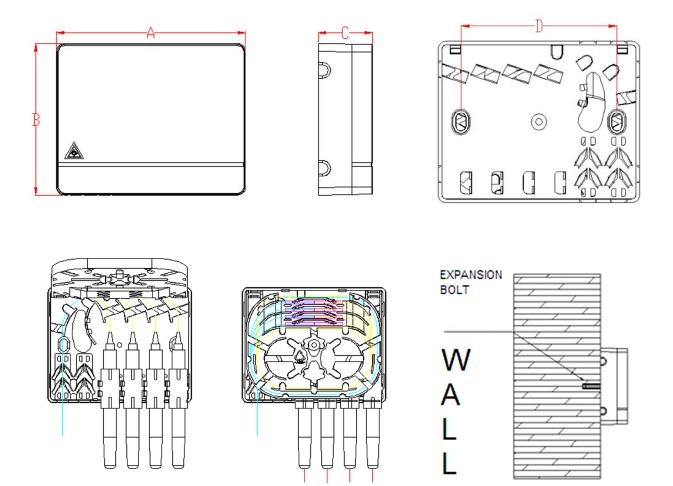

PART NUMBER GENERATOR

INTELMDW4	4 Port Micro Optical Fiber Distribution Frame
-----------	-----------------------------------------------