


CATEGORY 6 SHIELDED MODULAR PLUG

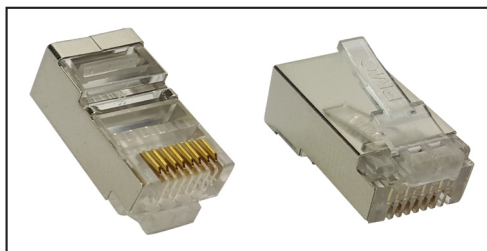

SPECIFICATIONS

Electrical	UL Applications	250 Volts AC MAX, AT 2 AMPS
	Dielectric Withstanding Voltage	1000 Volts AC
	Withstand Voltage Time	60 S
	Insulation Resistance	100 MΩ
	Termination	Resistance 20 MΩ MAX after Environmental Testing
Mechanical	Cable-to-Plug Tensile Strength	20 pound min.
	Durability	200 Mating cycles
Material	Housing	Polycarbonate, UI94V-0 or UL94V-2
	Color	Transparent or other color are available
	Contact Blade	Copper Alloy
	Conductor	Stranded & Solid wire, 24 AWG, 26 AWG (It can be used for the Wire od from $\phi 0.96 \sim \phi 1.02$)
	Gold Plating	3U" ~ 50u", are available
	Shielded Shell	Copper alloy
		0-35
	Shaded Area Signifies Copper Matieral	

PART NUMBER GENERATOR

INTEL6SC	Category 6 Shielded Modular Plug
----------	----------------------------------