


CATEGORY 6 UNSHIELDED MODULAR PLUG

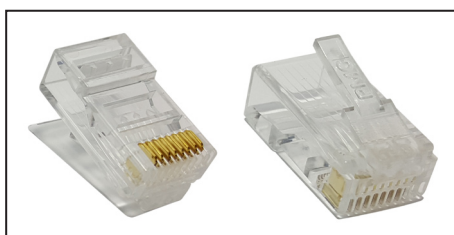

SPECIFICATIONS

Electrical	UL Applications	250 Volts AC Max AT2 AMPS
	Dielectric with standing voltage	1000 Volts AC. 60 SEC
	Insulation resistance	500 MΩ
	Contact resistance	20 MΩ MAX
	Operating ambient temperature	-20°C~ 75°C
Mechanical	Strain relife	20 pound min.
	Durability	1200 mating cycles
Material	Housing	Polycarbonate, UL94V-0 or UL94V-2
	Colour	Transparent or other colour are available
	Contact blade	Copper alloy
	Gold plating	3u"~ 50u", are available
Usage	Suitable for stranded & olid wire 33AWG~26AWG (It can be used for the wire OD from ϕ 0.96 ~ ϕ 1.02)	

PART NUMBER GENERATOR

INTEL6UC	Category 6 Unshielded Modular Plug
----------	------------------------------------